


254.00 EUR

incl. 19% VAT, plus shipping

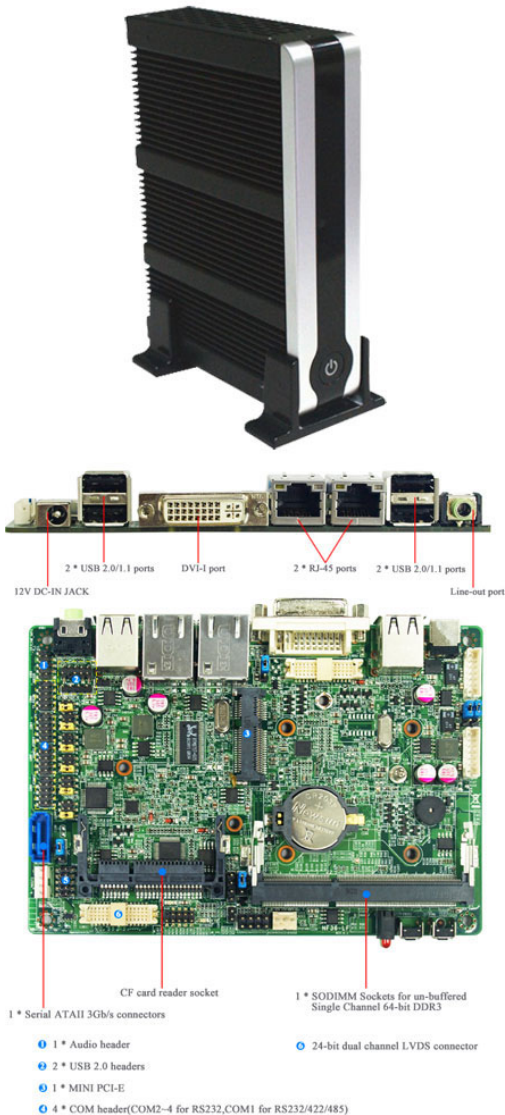

- INTEL® Cedar Trail-M Processor N2600 + NM10 Chipset
- Support 1 \* DDR3 800MHz Single CH up to 2GB
- Support DirectX 9 Graphics up to 640MHz
- Support 1 \* Serial ATAIII (3Gb/s) Devices
- Support Dual Gigabit LAN
- Support DVI-I Output
- Equipped with 802.11 b/g/n WiFi card & Internal Antenna (JBC362F36W-2600-B only)
- Support 2.5" SATA HDD
- Support Mini PCI-E socket
- Support CFast card socket
- Small size and provide VESA & Wall mount bracket (Optional)

**Model No**

**JBC362F36-2600-B / JBC362F36W-2600-B**

**Motherboard Specification**

<b>CPU</b>	INTEL® Cedar Trail-M Processor N2600 (1.6GHz)	
<b>Chipset</b>	INTEL®NM10 Express chipset	
<b>Memory</b>	1 * DDR3 800MHz Single CH SO-DIMM up to 2GB	
<b>Expansion Slots</b>	1 * Mini PCI-E	
<b>LAN</b>	2 * Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN	
<b>Audio</b>	Realtek ALC662 HD Audio CODEC with 4- Channel	
<b>Storage</b>	<b>1 * Serial ATA2 3Gb/s connector</b> <b>1 * CFast card socket</b>	
<b>BIOS</b>	AMI 16MB SMT Flash ROM	
<b>Form Factor</b>	3.5" SBC (148mm x 102mm)	
<b>Barebone Specification</b>		
<b>Product size</b>	152.6 (L)x110 (W)x34.8 (D)mm	
<b>Specs Devices</b>	1 x 2.5"HDD Drive Bay ( <b>Only support SATA 2.5"HDD</b> )	
<b>Colors</b>	Black	
<b>Front I/O Port</b>	1 * Power button	
<b>Rear I/O Port</b>	4 * USB 2.0 ports 2 * RJ-45 port(Gigabit LAN) 1 * DVI-I port	1 * 12V DC jack 1 * Line-out port

**Power supply**

+12V DC-IN Power

**Accessory**

60W AC-DC Adapter x 1      Power Cord x 1  
CD x 1                      Manual x 1  
DVI-I to CRT Converter x 1  
Wall Mount Bracket x 2 (Optional)    LCD VESA  
Mount Bracket x 1 (Optional)

**Application**

Set Top Box, Thin Client, Car PC Application,  
Smart Mini PC, Factory Automation.

**Packing**

Color Box Dimension 417(W) x 137(D) x  
296(H)mm  
Gross Weight 2.6KG              Net Weight 2.1KG