


179.00 EUR

incl. 19% VAT, plus shipping

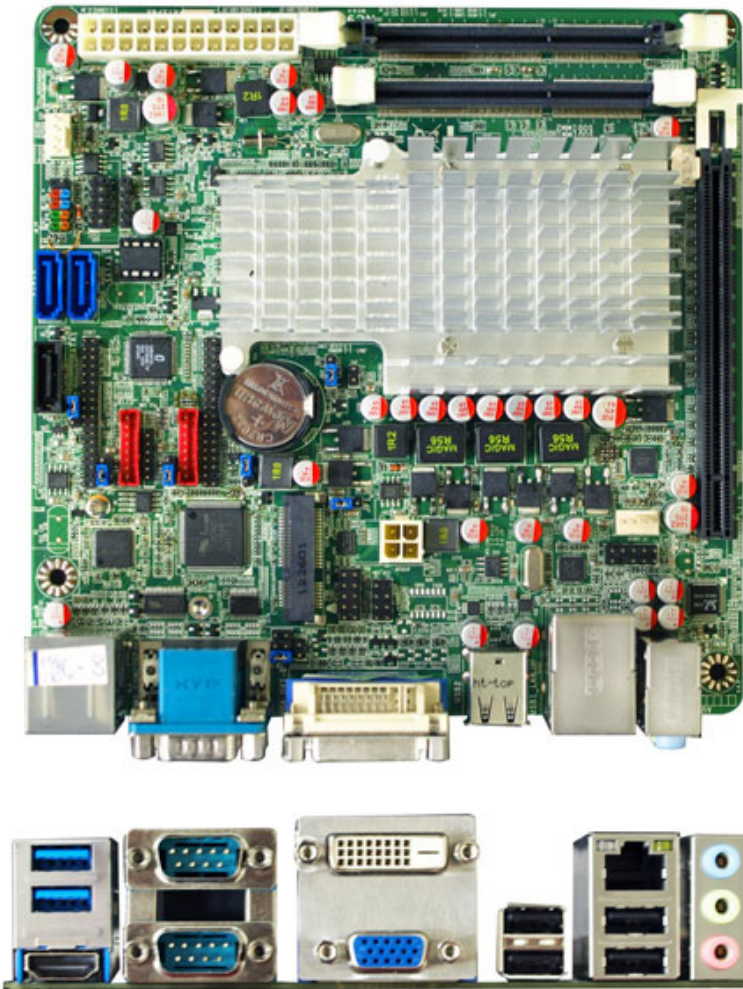

- INTEL® Celeron 847 Processor + NM70 Chipset
- Support 2 * DDR3 1066/1333MHz Dual-channel up to 16GB
- Support DirectX 10.1, DirectX10, DirectX9 Graphics
- Support 2 * Serial ATAll (3Gb/s) & 1 * Serial ATAllI (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 2 * 24 bits Dual Channel LVDS header
- Supports 1 * Realtek RT8111F Gigabit LAN
- Support 2 * COM ports (COM1 for RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• **CPU**

• INTEL® Celeron 847 Dual Core Processor (1.1GHz)

• **Chipset**

• INTEL®NM70 Express chipset

• **Memory**

• 2 * DDR3 1066/1333MHz Dual-channel SO-DIMM up to 16GB

- **Expansion Slots**
 - 1 * PCI –E x 16 slot
 - 1 * Mini PCI-E socket
- **Storage**
 - 2 * Serial ATA2 3Gb/s & 1 * Serial ATA3 6Gb/s connectors
 - 1 * mSATA (Share with Mini PCI-E slot)
- **Audio**
 - Realtek ALC662 6-Channel HD Audio
- **Ethernet LAN**
 - 1 * RTL8111F PCI-E Gigabit LAN
- **LVDS**
 - Onboard 2 * 24-bits Dual channel connector
- **USB**
 - Embedded 2 * USB 3.0 & 7 * USB 2.0/1.1
- **Special Features**
 - Support ACPI S3
 - Support CPU Smart FAN
 - Support Watch Dog
- **Rear Panel I/O**
 - 2 * USB 3.0
 - 4 * USB 2.0/1.1 ports
 - 1 * RJ-45 port
 - 3 * Audio I/O ports (Line-in, MIC and Line-out)
 - 1 * VGA port
 - 1 * DVI-D port
 - 1 * HDMI port
 - 2 * COM ports (COM1 for RS232/422/485)
- **Internal I/O**
 - 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports
 - 1 * PS/2 Mouse & 1 * Keyboard header
 - 2 * NB / Chassis Fan connectors;
 - 2 * LVDS headers /2 * Inverter headers
 - 1 * AUDIO header
- **BIOS**
 - AMI 32MB UEFI DIP Flash ROM
- **Functional**
 - ATM, Automation, Medical Equipment, Kiosk, Networking, POS, General Application, Transportation
- **Packing**
 - Color Box Dimension : 200(W) x 200(D) x 70(H)mm
- **Certificate**
 - CE, FCC, RoHS
- **Temperature**
 - Operating within 0~40 centigrade (**Suggest to use system FAN**)
 - Storage within -20-85 centigrade
- **Form Factor**
 - Mini ITX Form Factor(17cmx17cm)