


389.00 EUR

incl. 19% VAT, plus shipping

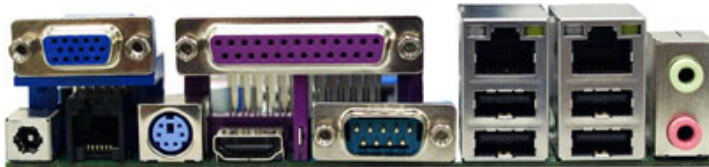

- INTEL® Celeron 1037U Processor + NM70 Chipset
- Support 1 \* DDR3 1600/1333MHz Single CH up to 8GB
- Support 1 \* Serial ATAI (3Gb/s) & 1 \* Serial ATAI (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 2-CH
- 1 \* 24 bits Dual Channel LVDS header
- Supports 2 \* Realtek RT8111F Gigabit LAN
- Support 6 \* COM ports (COM1 support RS232/422/485)
- 6 \* COM support +5V/+12V
- Support Watch dog Technology
- Provides AT mode power
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• **CPU**

- INTEL® Celeron 1037U Dual Core Processor (1.8GHz)

• **Chipset**

- INTEL®NM70 Express chipset

• **Memory**

- 1 \* DDR3 1600/1333MHz Single CH SO-DIMM up to 8GB

- **Expansion Slots**
  - 1 \* PCI –E x 1 slot
  - 1 \* half size Mini PCI-E socket
- **Storage**
  - 1 \* Serial ATA2 3Gb/s & 1 \* Aerial ATA3 6Gb/s connectors
  - 1 \* full size mSATA socket
- **Audio**
  - Realtek ALC662 6-Channel HD Audio
- **Ethernet LAN**
  - 2 \* RTL8111F PCI-E Gigabit LAN
- **LVDS**
  - Onboard 1 \* 24-bits Dual channel connector
- **USB**
  - Embedded 6 \* USB 2.0/1.1
- **Special Features**
  - Support ACPI S3
  - Support CPU Smart FAN
  - Support Watch Dog
- **Rear Panel I/O**
  - 4 \* USB 2.0/1.1 ports
  - 2 \* RJ-45 ports
  - 2 \* Audio I/O ports ( MIC and Line-out )
  - 1 \* VGA port
  - 1 \* Parallel port
  - 1 \* HDMI port
  - 1 \* COM port (COM1 for RS232/422/485)
  - 1 \* PS/2
  - 1 \* RJ-11 port
  - 1 \* 12V DC in jack
- **Internal I/O**
  - 1 \* USB 2.0/1.1 headers for 2 USB 2.0 ports
  - 2 \* NB / Chassis Fan connectors
  - 5 \* COM headers
  - 1 \* LVDS headers /1 \* Inverter headers
  - 1 \* AUDIO header
  - 1 \* Chassis Intrusion
- **BIOS**
  - AMI 32MB UEFI DIP Flash ROM
- **Functional**
  - POS Machine
- **Packing**
  - Color Box Dimension : 200(W) x 200(D) x 70(H)mm
- **Certificate**
  - CE, FCC, RoHS
- **Temperature**
  - Operating within 0~40 centigrade
  - Storage within -20-85 centigrade
- **Form Factor**
  - Mini ITX Form Factor(17cmx17cm)