


999.00 EUR

incl. 19% VAT, plus shipping

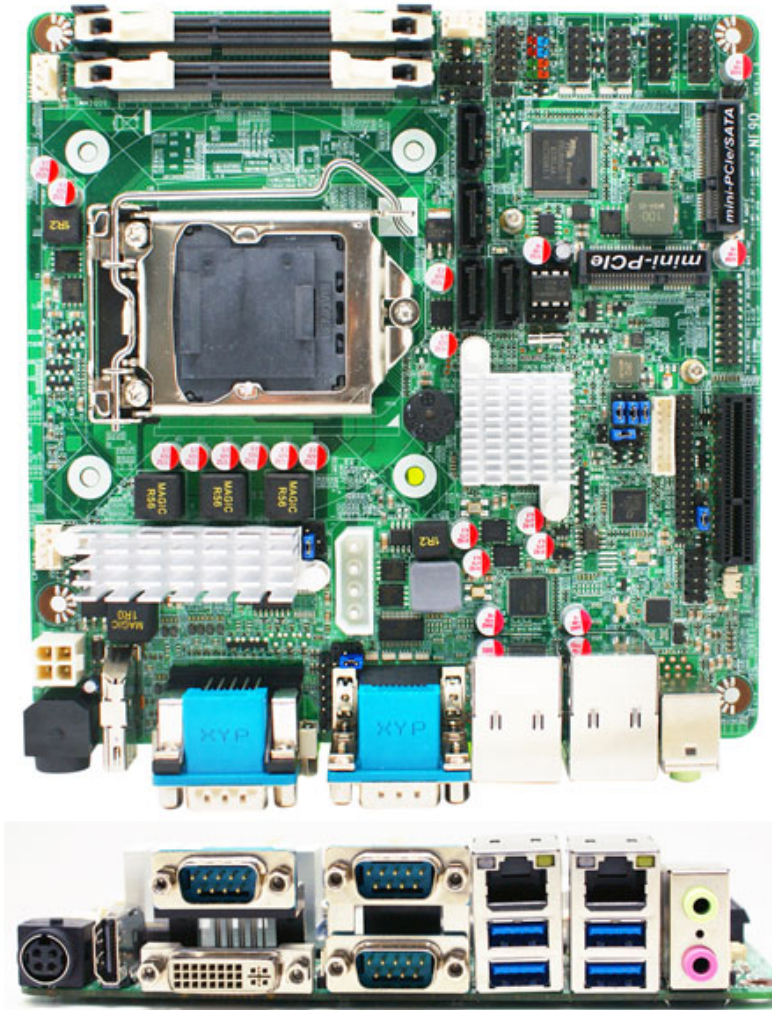

- Intel® Q87 Express Chipset
- Supports Intel LGA 1150 Socket Core™ i3, i5, i7 & Pentium Processors
- 2 * Dual Channel DDR3-1600/1333/1066 up to 16GB
- Intel I211AT & I217LM Gigabit LAN
- Intel Active Management Technology (iAMT 9.0)
- PCI Express x4 Slot
- Integrated 24-bit Dual Channel LVDS
- 4-ports SATA III 6Gb/s support RAID 0, 1, 5, 10
- HDMI & DVI-I Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)

• **CPU**

INTEL® LGA 1150 Socket Core i7/i5/i3/Pentium Processor

• **Chipset**

INTEL® Q87 Chipset

• Memory	2 * SO-DIMM 1600/1333 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
• Expansion Slots	1 * PCIe x 4 1 * half size Mini PCI-E slot
• Storage	4 * Serial ATA3 6Gb/s connectors support RAID 0, 1, 5, 10 1 * full size mSATA slot (Selectable W/Mini PCI-E)
• Audio	Realtek ALC662 6-Channel HD Audio CODEC
• Ethernet LAN	Intel INI211AT & INI217LM Gigabit Ethernet LAN
• LVDS	Onboard 24-bit Dual channel LVDS connector
• USB	Embedded 4 * USB 2.0/1.1 & 6 * USB 3.0
• Special Features	Support ACPI S3 Support CPU Smart FAN Support Watch Dog
• Rear Panel I / O	4 * USB 3.0 ports 2 * RJ-45 ports 1 * HDMI port 3 * COM ports (COM1 support RS232/422/485) 1 * DVI-I port 2 * Audio Jacks 1 * 9 ~ 24V DC-in jack
• Internal I / O	2 * USB 2.0/1.1 headers for 4 USB 2.0 ports 1 * USB 3.0 headers for 2 USB 3.0 ports CPU /NB / Chassis Fan connectors 1 * GPIO header 2 * COM headers 1 * Chassis Intrusion header 1 * AUDIO header 1 * HDMI-SPDIF header 1 * AT mode header 1 * 4-pin 12V ATX Power connector

- **BIOS** AMI EFI 64MB DIP Flash ROM
- **Form Factor** Mini-ITX Form Factor (170mm x 170mm)
- **Functional** ATM, Automation, Medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
- **Certificate** CE, FCC, RoHS
- **Temperature** Operating within 0~60 centigrade
Storage within -20-85 centigrade