


999.00 EUR

incl. 19% VAT, plus shipping

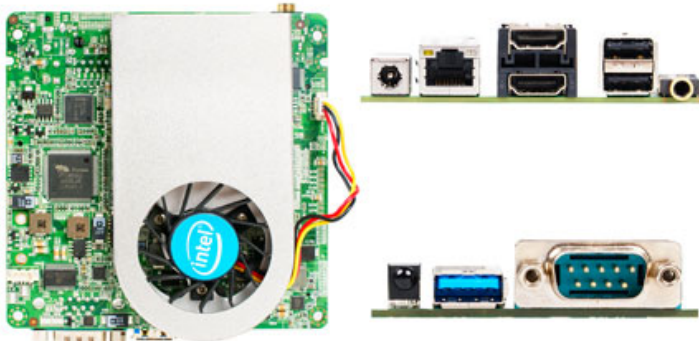

- INTEL Bay Trail SOC chipset
- Onboard INTEL® Bay Trail J1900 / N2930 processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support PCI Express INTEL® Gigabit LAN
- Support Power Onboard(wide voltage input : 9~24V)
- Onboard 1*Mini PCI-E connector
- Onboard 1*M-SATA connector
- Support 1*USB3.0
- Support 2*HDMI port
- 2 Phase CPU Power Support
- Support slim Fan design
- **NUC** Form Factor(101mm X101mm)

• **CPU/Chipset**

- INTEL® Bay Trail SOC chipset
- Onboard INTEL® Bay Trail J1900 processor

- **I.O Chipset**
 - **Memory**
 - **Expansion Slots**
 - **Storage**
 - **Audio**
 - **Ethernet LAN**
 - **USB**
 - **Special Features**
 - **Back Panel I / O**
 - **Internal I / O**
 - **BIOS**
 - **Form Factor**
- FINTEK F71869A
 - 1*SO-DIMM slot
 - Support DDR3L 1333
 - Max. capacity of system memory up to 8GB
 - 1 * Mini PCI-E connector (Half size)
 - 1 * [M-SATA Connector](#) (Full size)
 - ALC887 Audio CODEC
 - HD Audio CODEC / Spdif out
 - INTEL® WG82574L Chip
 - 1* PCI Express Gigabit LAN
 - 2* USB 2.0
 - 1* USB 3.0
 - Support CPU Smart Fan
 - Support Watch dog Technology
 - Support Power On board
 - Support CIR Led
 - Support slim Fan design
 - All Tantalum Capacitor design
 - [All Power Pack MOSFET design](#)
 - 2* USB 2.0 ports
 - 1* USB 3.0 port
 - 1* RJ-45 port
 - 1* Line-out connector
 - 2* HDMI ports
 - 1* COM port
 - 1* DC in (wide voltage input : 9~24V)
 - 1* COM header
 - 1* M-SATA Connector
 - 1* Mini PCI-E connector
 - AMI 64MB DIP Flash ROM
 - Thin mini ITX Form Factor(101mm X 101mm)