


279.00 EUR

incl. 19% VAT, plus shipping

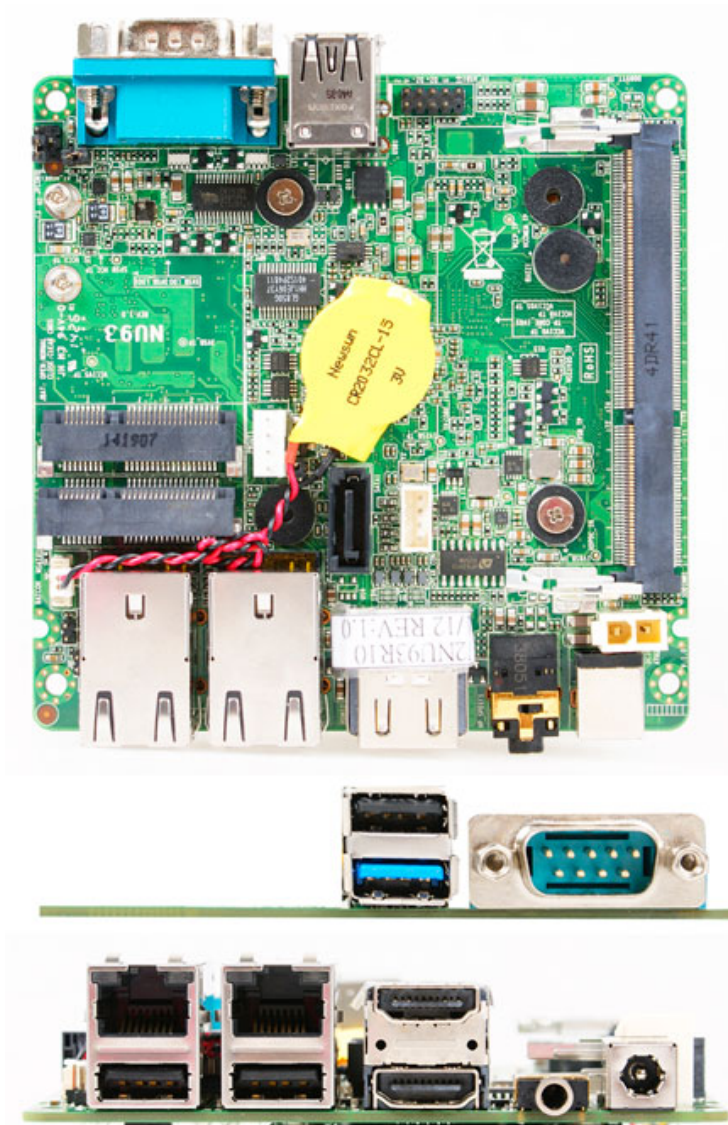

- INTEL® Bay Trail SOC chipset
- Onboard INTEL® Bay Trail J1900/N2930 Quad Core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 2\* INTEL® Gigabit LAN (WG82574L)
- Support 2\*HDMI Ports
- Support 1\*USB3.0 Port
- Support Power Onboard(wide voltage input : 9~24V)
- Onboard 1\*MiniPCI-E connector
- Onboard 1 \*M- SATA connector
- 1 Phase CPU Power Support
- Support slim Fan design
- **NUC** Form Factor(101mm X101mm)

- **CPU/Chipset**
  - INTEL® Bay Trail SOC chipset
  - Onboard INTEL® Bay Trail J1900/N2930 Quad Core CPU
- **I.O Chipset**
  - FINTEK F81803U
- **Memory**
  - 1\* SO-DIMM slot
  - Support DDR3L 1333
  - Max. capacity of system memory up to 8GB
- **Expansion Slots**
  - 1\* Mini PCI-E connector (Half size)
- **Storage**
  - 1\* [M-SATA Connector](#) (Full size)
- **Audio**
  - ALC887 Audio CODEC
  - HD Audio CODEC / Spdif out
- **Ethernet LAN**
  - 2\* INTEL® WG82574L Chip
  - PCI Express Gigabit LAN
- **USB**
  - 4\* USB 2.0
  - 1\* USB 3.0
- **Special Features**
  - Support CPU Smart Fan
  - Support Watch dog Technology
  - Support Power On board
  - Support slim Fan design
  - Support 1\*RS422/RS485/RS232 COM port
  - Support Amplifier function(3W)
  - All Tantalum Capacitor design
  - [All Power Pack MOSFET design](#)
- **Back Panel I / O**
  - 2\* USB 2.0 ports
  - 2\* RJ-45 port
  - 1\* Line-out connector
  - 2\* HDMI ports
  - 1\* DC-Jack
- **Internal I / O**
  - 1\* USB 3.0 port
  - 1\* USB2.0 port
  - 1\* COM port
  - 1\* USB2.0 header
  - 1\* SATA2.0
  - 1\* 4Pin SATA Power connector
- **BIOS**
  - AMI 64MB SMT Flash ROM
- **Form Factor**
  - Thin mini ITX Form Factor(101mm X 101mm)