
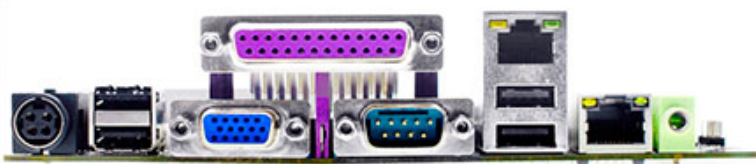


999.00 EUR

incl. 19% VAT, plus shipping

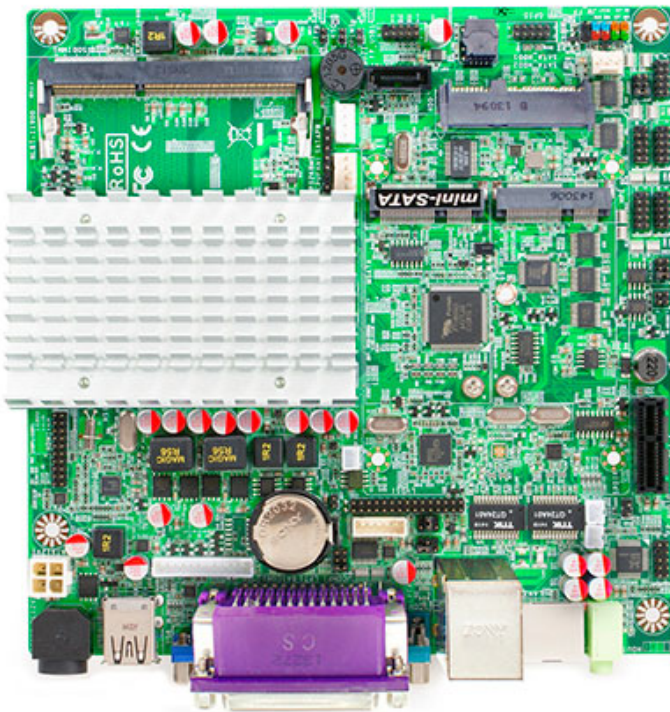

- Intel® Celeron™ J1900 (2.0 GHz) quad-core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 2*PCI Express Gigabit LAN
- Support Power Onboard(12V)
- Onboard 1*MiniPCI-E connector
- Onboard 1 *M- SATA connector
- 2 Phase CPU Power Support
- Support Slim Fan design
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

• **CPU-Chipset**

- INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor
- 2 Phase CPU Power Support

• **I.O Chipset**

- Fintek F71869

- **Memory**
 - 1*SO-DIMM slot
 - Support DDR3L 1333
 - Max. capacity of system memory up to 8GB
- **Expansion Slots**
 - 1 * MiniPCI-E connector
 - 1* PCIe1 slot
- **Storage**
 - 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin)
 - 1 * [M-SATA Connector](#)
- **Audio**
 - ALC887 Audio CODEC
 - HD Audio CODEC
- **Ethernet LAN**
 - Realtek® RTL8111G Chip
 - 2*PCI Express Gigabit LAN
- **LVDS**
 - Onboard 24-bit Dual channel
- **USB**
 - 6* USB 2.0/1.1(4 distribute in back panel, 2 distribute in mid-board)
- **Special Features**
 - Support CPU Smart Fan
 - Support Watch dog Technology
 - Support GPIO Technology
 - Support VGA header
 - Support HDIM header
 - Support Power On board
 - Support Amplifier function(3W)
 - Support Slim Fan design
 - [Support Slim hard drive design](#)
 - Support 1*RS422/RS485/RS232 COM port
 - Thunder Protection Function
 - All Solid Capacitor design
 - [All Power Pack MOSFET design](#)
- **Back Panel I / O**
 - 4* USB 2.0/1.1 ports
 - 2* RJ-45 port
 - 1* Print Port
 - 1* Line-out connector
 - 1 * VGA port
 - 1 * COM port (1*RS422/RS485/RS232 COM port)
 - 1* 12V DC in

- **Internal I / O**

- 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports
- 2*CPU / Chassis Fan connectors
- 5*COM headers
- 1*PS2/KB header
- 1 *4-pin ATX 12V Power connector
- 1 *4-pin SATA Power connector
- 1 *15-pin VGA header
- 1 *20-pin HDMI header
- 1 *24-bit Dual Channel LVDS header
- 1 *GPIO header
- 1 *Mini PCI-e connector
- 1 * M-SATA Connector
- 1* SATA+Power Connector(7+15Pin)(Option)
- 1 * Audio header
- 1 * Front panel header
- 1* HDMI_SPDIFheader

- **BIOS**

- AMI 32MB DIP Flash ROM

- **Form Factor**

- Thin mini ITX Form Factor(170mm X 170mm)