
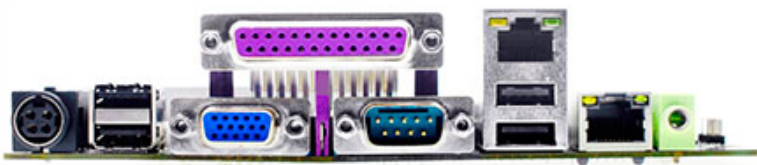


229.00 EUR

incl. 19% VAT, plus shipping

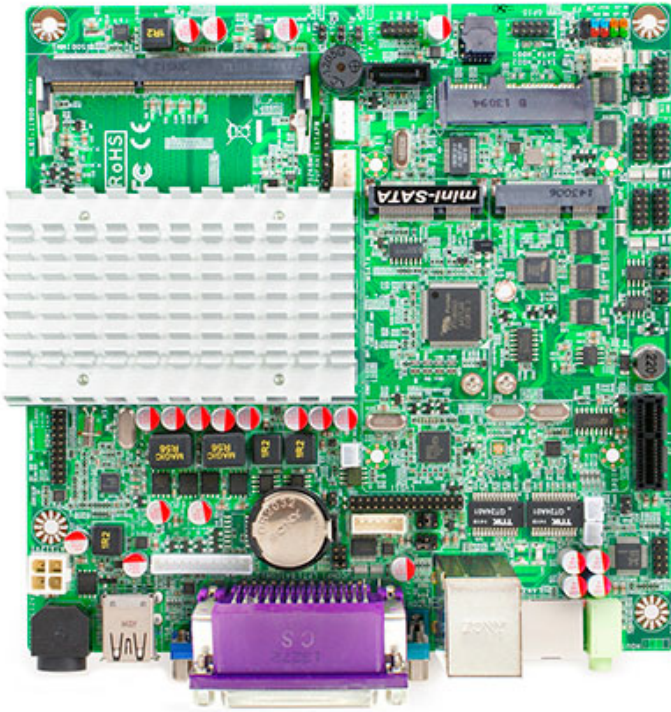

- INTEL Bay Trail I1900 / N2930 Quad Core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 1*PCI Express Gigabit LAN
- Support 1*USB3.0 port
- Onboard 1*MiniPCI-E connector
- Onboard 1 *M- SATA connector
- 2 Phase CPU Power Support
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

• **CPU-Chipset**

- INTEL Bay Trail I1900 / N2930 Quad Core processor
- INTEL® Bay Trail SOC chipset
- 2 Phase CPU Power Support

• **I.O Chipset**

- Fintek® F71869A

- **Memory**
 - 1* SO-DIMM slot
 - Support DDR3L 1333
 - Max. capacity of system memory up to 8GB
- **Expansion Slots**
 - 1* Mini PCI-E connector
 - 1* PCIe1 slot
- **Storage**
 - 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin)
 - 1* [M-SATA Connector](#)
- **Audio**
 - AVLC887 Audio CODEC
 - HD Audio CODEC
- **Ethernet LAN**
 - Realtek® RTL8111G Chip
 - PCI Express Gigabit LAN
- **LVDS**
 - Onboard 24-bit Dual channel
- **USB**
 - 5* USB 2.0/1.1(3 distribute in back panel, 2 distribute in mid-board)
 - 1* USB3.0
- **Special Features**
 - Support CPU Smart Fan
 - Support Watch dog Technology
 - Support GPIO Technology
 - Support VGA header
 - Support Power On board
 - Support Amplifier function(3W)
 - [Support Slim hard drive design](#)
 - Support 1*RS422/RS485 COM header
 - Thunder Protection Function
 - All Solid Capacitor design
 - [All Power Pack MOSFET design](#)
- **Back Panel I / O**
 - 3* USB 2.0/1.1 ports
 - 1* USB3.0 port
 - 1* RJ-45 port
 - 1* Line-out port
 - 1* VGA port
 - 1* COM port
 - 1* 12V DC in

- **Internal I / O**

- 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports
- 2* CPU / Chassis Fan connectors
- 5* COM headers(1*RS422/RS485)
- 1* PS2/KB header
- 1* 4-pin ATX 12V Power connector
- 1* 4-pin SATA Power connector
- 1* 12-pin VGA header
- 1* 20-pin HDMI header
- 1* 24-bit Dual Channel LVDS header
- 1* GPIO header
- 1* Mini PCI-e connector
- 1* M-SATA Connector
- 1* SATA +Power Connector(7+15Pin)(Option)
- 1* Audio header
- 1* Front panel header
- 1* HDMI _SPDIF header

- **BIOS**

- AMI 64MB DIP Flash ROM

- **Form Factor**

- Thin mini ITX Form Factor(170mm X 170mm)