


229.00 EUR

incl. 19% VAT, plus shipping

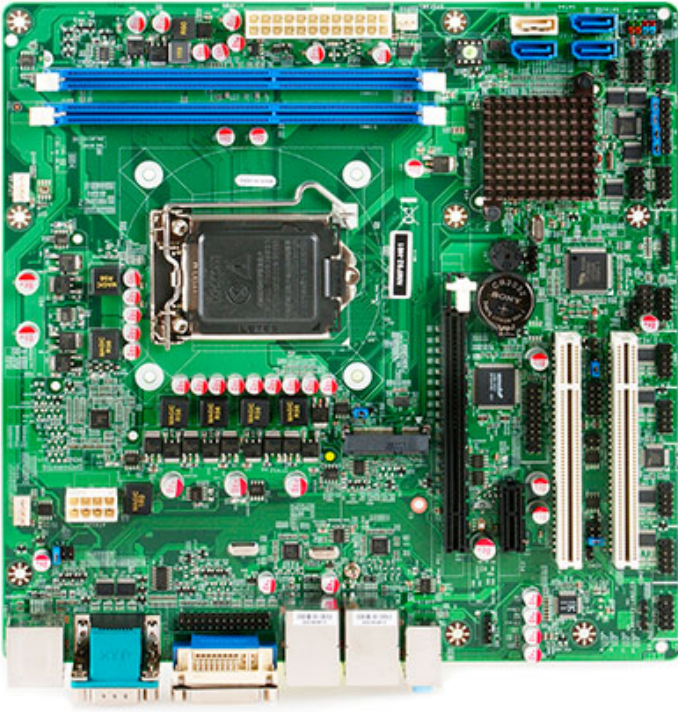

- INTEL® H61 Chipset
  - Support INTEL® LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
  - Support 2 \* 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
  - Support TPM 1.2 function
  - 1 \* Mini PCI-E slot (Selectable W/mSATA)
  - 4 \* SATA2 connectors (SATA4 share with mSATA)
  - HDMI, DVI-D and VGA Video Outputs
  - Support 10 \* COM ports (COM3 for RS232/422/485)
  - Support CPU Smart FAN
  - Supports 2 \* Gigabit LAN
  - Supports ACPI S3 Function
  - Support Watch dog Technology
  - Micro ATX form factor
- 
- |                  |  |
|------------------|--|
| • <b>CPU</b>     | • INTEL® LGA 1155 Socket Core i7/i5/i3/<br>Pentium Processor           |
| • <b>Chipset</b> | • INTEL® H61 Chipset   |
| • <b>Memory</b>  | • 2 * 240 pin 4GB 1333/1066 Dual CH DDR3<br>SDRAM DIMM Max. up to 16GB |

- **Expansion Slots**
  - 1 \*PCIe x 16, 2 \* PCI, 1 \* PCIe x 1
  - 1 \* MINI PCI-E (Selectable with mSATA)
- **Storage**
  - 4 \* Serial ATA2 3Gb/s connectors (SATA4 share with mSATA)
  - 1 \* mSATA (Selectable with Mini PCI-E)
- **Audio**
  - Realtek ALC662 6-Channel HD Audio CODEC
- **Ethernet LAN**
  - Realtek RTL8111E PCI-E Gigabit Ethernet LAN \*2
- **USB**
  - Embedded 9 \* USB 2.0/1.1
  -
- **Special Features**
  - Support ACPI S3
  - Support CPU Smart FAN
  - Support Watch Dog
- **Rear Panel I / O**
  - 6 \* USB 2.0/1.1 ports
  - 2 \* RJ-45 ports
  - 2 \* COM ports
  - 1 \* VGA port
  - 1 \* DVI-D port
  - 1 \* HDMI port
  - 3 \* Audio Phone Jack
- **Internal I / O**
  - 2 \* USB 2.0/1.1 headers for 3 USB 2.0 ports
  - CPU /NB / Chassis Fan connectors
  - 1 \* PS2/KB header
  - 1 \* GPIO header
  - 8 \* COM header ( COM3 for RS232/422/485)
  - 1 \* TPM 1.2 header
  - 1 \* Parallel header
  - 1 \* Chassis Intrusion header
  - 1 \* AUDIO header
  - 1 \* 24-pin & 8-pin 12V ATX Power connector
- **BIOS**
  - AMI EFI 32MB SMT Flash ROM
- **Form Factor**
  - Micro ATX Form Factor (244mm x 244mm)
- **Functional**
  - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
- **Certificate**
  - CE, FCC, RoHS
- **Temperature**
  - Operating within 0~60 centigrade
  - Storage within -20-85 centigrade