



CARTFT.COM  
Shop for mobile  
PC- and GPS-Solutions


Jetway HPC-150SR-3160-BC Panel-PC (15" 1024x768 5W Touchscreen, Intel Celeron N3160, 4GB RAM)

[<http://www.cartft.com/catalog/il/2235>]



1069.00 EUR

incl. 19% VAT, plus shipping

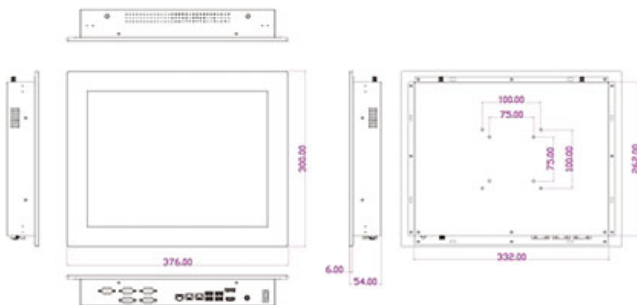

- INTEL® Braswell-M N3160 SOC
- Onboard INTEL® Braswell-M N3160 2.24GHz Quad Cores CPU
- Onboard 4G/1600MHz DDR3L Memory
- 1\* 64G M.2 SSD
- Support DirectX 12 3D Graphics Acceleration
- Support 1\*Serial ATAIII (6Gb/s) Device
- Support Dual INTEL® Gigabit LAN
- Support HDMI+DP Output
- Support 6\* COM ports ( COM2 Support RS422/485 )
- Support 1\*M.2 Socket for 60G SSD
- Support 1\*Mini PCI-E Socket
- Support 4\* USB3.0 Ports
- Support wide voltage input :9~36V
- 60mm thin, slice design
- VESA mount(100mm X100mm &75mm x 75mm)

## Panel

Viewable Size Image	150 inch With LED Backlight
Active Area	304.128(H) x 228.096(V)
Resolution	1024 x 768 @60Hz
Display Color	262K
Pixel Pitch	0.297 x 0.297 mm
Aspect Ratio	4:3
Contrast Ratio	700:1
Max Brightness	350 cd/m <sup>2</sup>
Viewing Angle(H/V)	H170/V160
Response Time	5.7ms
Temperature Range	0°C ~ +65°C(Operating)

## Touch

Touch panel style	5 wires analog resistive
Active Range	304.10 x 228.10mm ±0.2mm
Temperature Range	-10 ~ +60°C(Operating)
Transparency	80 ±3%
Surface Hardness	≥ 3H (ASTM D3363, pressure 750g/45°)
Operating Force	≤ 80g
Knock test	10,000,000 times keystrokes

## Case

Panel Material	Aluminum
Case Material	Iron
Color	Silver
Coating Requirement	Spray Paint
Speaker	2-CH(3W)
Bracket	6 (Top:2pcs、 Side:4pcs, Optional)
Installation Type	Open Frame / Wall Hanging ( Optional )
Cooling Mode	Fanless Fully sealed design

## System Specification

Form Factor	3.5"
Processor	INTEL® Braswell-M N3160 2.24GHz/QC
System Chipset	INTEL® Braswell -M N3160 (SOC)
System Memory	4G/1600MHz DDR3L SAMSUNG DRAM
BIOS	64MB SPI Flash ROM
Ethernet	1* Gigabit LAN
Audio	Realtek® ALC662 HD Audio
Storage	1* Serial ATA3 6Gb/s connector

WIFI Module	1* M.2 64G SSD
Optical Device	N/A(Optional)
Expansion	N/A
Display Output	PCI-E mini card for WLAN
I.O Port	HDMI+DP
Power Adapter	4*USB3.0、 6*RS232(1*RS232/422/485)、 2*RJ45CK
OS Support	DC-IN (9~36V)
Temperature	Windows 7/8.1/10(Windows 7 64 bit)
Humidity	Operating : -10 ~ +60°C
Shock	20%~90% (non condensing)
Vibration	Operating : 15G , 11ms duration
Net Weight (kg)	Operating : 5~500Hz/1 Grms
Dimension	376.0mm*300.0mm*60.0mm
Certification	FCC CE ROHS
Other	Support Non wire I.O interface output

## Other Information

Application	Commercial、 Banking、 Digital Signage POS/KIOSK、 Industrial Automation
Special Features	Metal design, compact、 slice
Other	Optional wall hanging telescopic bracket, etc., can also be used as the embedded security