




**CARTFT.COM**  
Shop for mobile  
PC- and GPS-Solutions

**Jetway HPC156SC-FP1900B Panel-PC (15.6" 1920x1080 PCAP Touchscreen, Intel N2807, 2GB RAM) [IP65/NEMA4 Front]**  
[<http://www.cartft.com/catalog/il/2355>]

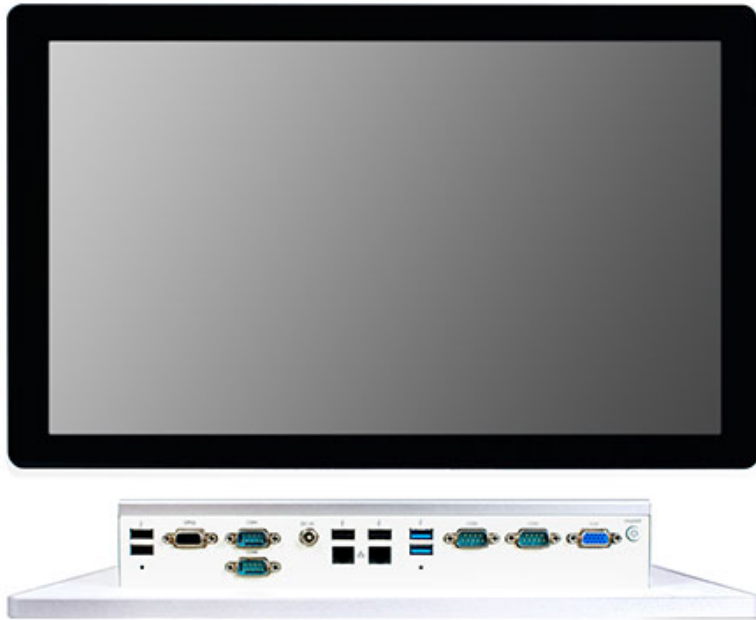

1109.00 EUR

incl. 19% VAT, plus shipping

- 15.6" 250 nits high brightness TFT LCD with LED backlight
- 10-points Multi Capacitive Touch
- Cable less, Streamlined enclosure for highly efficient heat dissipation Enclosed in robust aluminum casings
- Edge-to-edge narrow bezel design and Fanless cooling system
- Design for easy Wall mount, Panel Mount, VESA Mount installation
- A true Flat, easy-to-clean front surface with edge-to-edge design
- Lockable USB device bracket supported
- Front bezel meets IP65-rated protection
- 9-28V DC-input Support, with EOS, OVP design

Jetway HPC156SC-FP1900B Flat-Panel Fanless Panel PC provides outstanding outlook with industrial-grade quality for comprehensive industrial markets, such as retails, wholesales, hospitality, hospital or meeting room registration, logistics, self-service kiosk, residential automation and digital signage.

Jetway HPC156SC-FP1900B Flat-Panel Fanless Panel PC is designed with 10-points Multi capacitive type touch screen. High brightness TFT LCD panel with LED backlight are equipped with this model. Cable-free design is easy for the HDD and memory installation. Streamlined enclosure with narrow bezel design.

Jetway HPC156SC-FP1900B Flat-Panel Fanless Panel PC is designed with a true flat, easy-to-clean front surface with edge-to-edge design. It is designed mounting clips for easy Wall mount, Panel Mount, VESA Mount installation.

Front bezel meets IP65-rated & NEMA 4 protection. Welcome to use Jetway Flat-Panel Panel PC.

**Display**

Front Bezel	- IP65, NEMA 4 rugged protection, Full planar metal border
Display Type	- 15.6" With LED Backlight
Brightness (cd/m <sup>2</sup> )	- 250 nits
Display Color	- 262K
Resolution	- 1920 x1080 @ 60Hz
Viewing Angle (H/V)	- 170°/170°
Pixel Pitch	- 0.17925 x 0.17925 mm
Aspect Ratio	- 16:9
Contrast Ratio	- 800:1
Response Time	- 35 ms

### **Touch Screen**

Type	- projected capacitive type
Active Range	- 387.00 x 231.00mm ±0.3mm
Transparency	- ≥85%
Surface Hardness	- ≥6H (JIS-5400)
Glass haze value	- ≤ 3%

### **CASE**

Panel Material	- Aluminum
----------------	------------

Case Material	- Iron
Color	- Silver + white
Coating Requirement	- Spray Paint

### Main System

CPU	- Intel® Bay Trail-D J1900 2.0GHz/QC
RAM	- 4G 1333MHz DDR3L SAMSUNG DRAM
BIOS	- 64MB SPI Flash ROM
Storage	- 1* 2.5" SATA bay - 1* M.2 connector (2242/2260/2280)
Watchdog Timer	- 256 levels, 0~255 sec.
OS Support	- Windows 7 / 8.1 / 10 / Linux (Option)

### I/O Connector

I/O Ports and Switches	- 2 * USB3.0 - 4 * USB2.0 - 1 * 8bit GPIO - 2 * RS232 - 2 * RS232/422/485 - 1 * VGA - 2 * LAN (INTEL I211AT Gigabit LAN) - 1 * Locking Jack 9~28V DC input - 1 * Power button
------------------------	---

### Expansion Interface

Expansion	- 1 * PCI-E mini card for WIFI or 3G/4G
-----------	---

### Power

Power Input	- Supports 9-28V DC Power in with over current protection fuse - Provides 100~240V AC-DC 12V, 60W power adapter
-------------	--

Power Consumption	- 23W
-------------------	-------

### **Dimension**

Case Dimensions	- 391.00*239.00*59.7mm
-----------------	------------------------

### **Certifications**

Certifications	- CE, FCC, IP65(Front)
----------------	------------------------

### **Environment**

Temperature	- Operating Temperature: -10 ~ 60° C (with W.T. DRAM/HDD in airflow condition) - Storage Temperature: -20 ~ 85° C
-------------	---

Shock	- Operating: 15G , 11ms duration
-------	----------------------------------

Vibration	- Operating: 5~500Hz/1 Grms
-----------	-----------------------------

### **Warranty**

Warranty	- 2 Years Limited Warranty(Panel and Touch is only Warranty 1 Year)
----------	---