


999.00 EUR

incl. 19% VAT, plus shipping

- **1x LAN !**
- **1x SO-DIMM !**

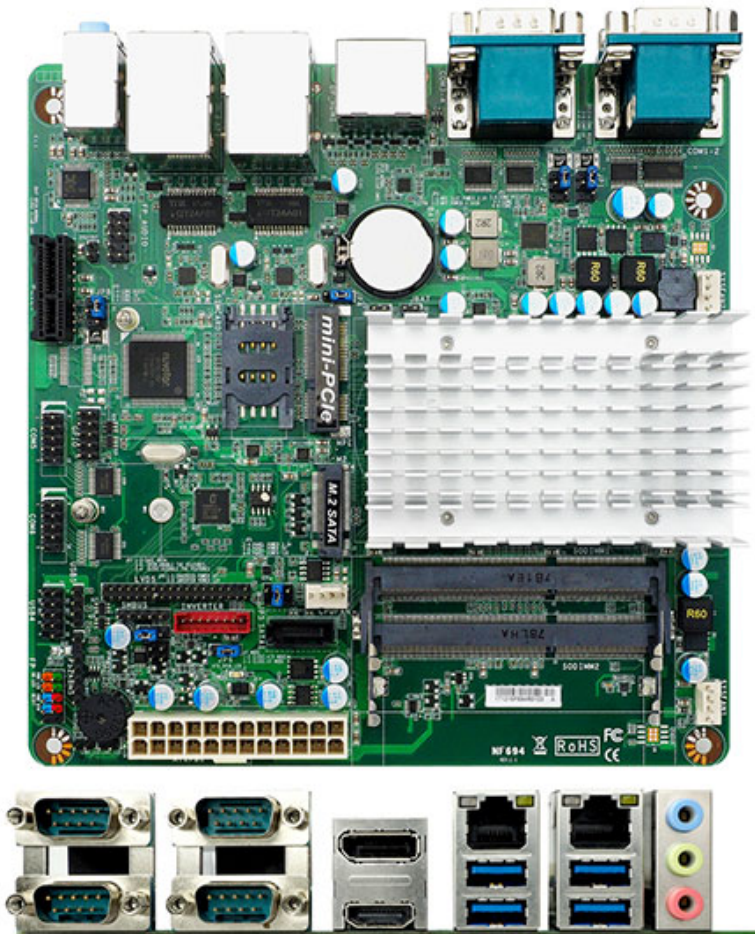

The JETWAY JNF694 series are Mini-ITX form factor board adopts the Intel® Apollo Lake SoC Processor. The board supports DDR3L 1866Mhz SODIMM memory, up to 8GB. Featuring the integrated Realtek Gigabit Ethernet controller, the JNF694 offers 10/100/1000Base-TX Ethernet devices for network transmission. SATAIII (6Gb/s) interface and one M.2 (M-key, 2242/2260) offer storage devices. One Mini PCIe interface, four USB3.0 ports, three USB2.0 ports and four to six COM ports provide versatile expansion. The JNF694 offers DP interface which can support max. 4K@60Hz resolution. Because of the above features, JNF694 is one of the best selections for digital signage and automation applications.

- Intel® Apollo Lake SoC Processor
- 1/2 \* DDR3L SODIMM Up to 8 GB
- 1/2 \* 10/100/1000 Base-TX Ethernet Ports
- Support 1 \* HDMI + 1 \* DP display
- 4/6 \* COM, 4 \* USB3.0 & 2 \* USB2.0
- 1 \* PCIe x1 slot, 1\* Mini PCIe slot (1\* full size), 1 \* M.2 (M-key, 2242/2260)
- Support 1 \* SATA III (6Gb/s)
- 24-pin ATX PWR

**Model**

**JNF694-3350/4200**

**JNF694L-3350/4200**

Model	– JNF694-3350 – JNF694-4200	– JNF694L-3350 – JNF694L-4200
Part Number	– JNF694-3350 – JNF694-4200	– JNF694L-3350 – JNF694L-4200

## Form Factor

Dimensions	– Mini-ITX (6.7-in * 6.7-in, 170 * 170mm)
------------	---

## Processor System

CPU	– Intel® Apollo Lake SoC Processo
Core Number	– (by CPU)
Max Speed	– (by CPU)
L2 Cache	– (by CPU)
Chipset	– SoC
BIOS	– AMI Flash ROM

## Expansion Slot

Mini-PCIe	– 1 (full size)
mSATA	– 0
PCIe	– 1 * PCIe x1
M.2	– 1 (M-key, 2242/2260)
SIM Card Holder	– 1

## Memory

Technology	– Dual CH DDR3L 1866MHz SDRAM	
Max.	– 8GB	
Socket	– 2 * SO-DIMM	– 1 * SO-DIMM

## Graphics

Controller	– Intel® HD Graphics
VRAM	– Shared Memory
VGA	– 0
LVDS	– 1 (max. 1920 x 1080@60Hz resolution)
eDP	– 0
HDMI 1.4	– 1 (Max. Resolution : 3840*2160@24Hz)
DisplayPort 1.2	– 1 (Max. Resolution : 4096*2160@60Hz)
MultiDisplay	– Triple Displays

## Ethernet

Ethernet	– 10/100/1000 Mbps	
Controller	– PCIe GbE LAN : Realtek RTL8111H	
Connector	– 2 * RJ 45	– 1 * RJ 45

## Audio

CODEC	– HD Audio: Realtek ALC662	
Channel	– 6 Channel	
<b>SATA</b>		
Max Data Transfer Rate	– 1 * SATAIII (6.0Gb/s)	
<b>Rear I/O</b>		
VGA	– 0	
HDMI	– 1	
DisplayPort	– 1	
Ethernet	– 2	– 1
USB	– 4 * USB 3.0	
Audio	– 3 (Line-In, Line-Out, MIC)	
Serial / Parallel	– 4 (COM1 support RS232/422/485)	– 4
PS2	– 0	
DC-input	– 0	
<b>Internal Connector</b>		
USB	– 3 * USB 2.0	
PS/2	– 1	
LVDS / inverter	– 1	

eDP	- 0
VGA	- 0
Serial	- 2   - 0
SATA	- 1 * SATAIII (6.0Gb/s)
mPCIe	- 1 (full size)
mSATA	- 0
M.2	- 1 (M key-2242, 2260)
GPIO	- 1 (8 bit)
Chassis intrusion	- 1
Audio Header	- 1
SMBUS/ I2C	- 1
AT mode	- 1
TPM	- 1 (on board option)
Others	- 0

## Watchdog Timer

Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 10sec...255min

## Power Requirements

Input PWR	– ATX PWR Connector
Power On	AT/ATX Supported – AT : Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	– CE, FCC, RoHS, REACH
<b>Environment</b>	
Temperature	– Operating: 0°C ~ 60°C(with 0.7m/s air flow)
	– Storage: -20°C ~ 85°C
<b>Warranty</b>	
Warranty	– 2 Years Limited Warranty