


459.00 EUR

incl. 19% VAT, plus shipping

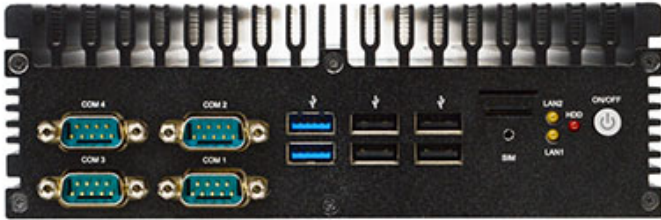

- Intel® Bay Trail SoC Processor (Default: J1900)
- Support 1 * SO-DIMM DDR3L-1333MHz up to 8GB
- All-aluminum body, produced by casting process
- Operating Temperature: -40 ~ 70° C
- 9~24V DC-in (Lockable type)

MB Model	- MZ93-00B
Part No.	- HBJC386Z93-00B - HBJC386Z93W-00B (support WiFi)
BIOS	- AMI Flash ROM
CPU/Chipset	- Intel® Bay Trail SoC Processor (Default: J1900)
Memory	- Support 1 * SO-DIMM slots DDR3L-1333MHz up to 8GB

Network	<ul style="list-style-type: none"> - 2 * Intel i211-IT GbE - 1 * M.2 E-key 2230 slot (USB2.0/PCIex1) - 1 * M.2 B-key 3042 slot (USB3.0)
Storage	<ul style="list-style-type: none"> - Support 1 * M.2 M-key 2242/2280 slot for SSD
Expansion	<ul style="list-style-type: none"> - 2 * Mini PCIe (full-size, for WiFi & CAN BUS expansion) - 1 * Mini PCIe slot (only USB signal, full-size, for 4G LTE + GPS expansion)
Rear Panel I/O	<ul style="list-style-type: none"> - 2 * RJ45 - 1 * DVI-I (Max. Resolution: 1920 * 1200@60Hz) - 1 * HDMI (Max. Resolution: 1920 * 1200@60Hz) - 1 * 8 bit GPIO - 1 * Line out & MIC combo - 1 * DC-in (Lockable type)
Front Panel I/O	<ul style="list-style-type: none"> - 1 * Power SW + Power LED - 1 * HDD LED , 2 * LAN LED - 1 * SIM Card slot - 4 * COM (COM1_support RS485) - 4 * USB2.0 - 2 * USB3.0
Power Source	<ul style="list-style-type: none"> - Adapter / AC 90~240V input / DC12V-5A-60W - MB : support DC 9~24V input
Compliance	<ul style="list-style-type: none"> - CE, FCC, LVD, RoHS, ErP Ready
Temperature	<ul style="list-style-type: none"> - Operating Temperature: -40 ~ 70° C (Under the condition of using M.2 interface SSD) (The test environment is closed and windless) - Storage Temperature: -40 ~ 80° C - Humidity: 10% ~ 90% RH @40°C (non-condensing)
Dimensions	<ul style="list-style-type: none"> - 185 (W) x 142 (D) x 60 (H) mm
OS Support	<ul style="list-style-type: none"> - Windows 10, Linux