
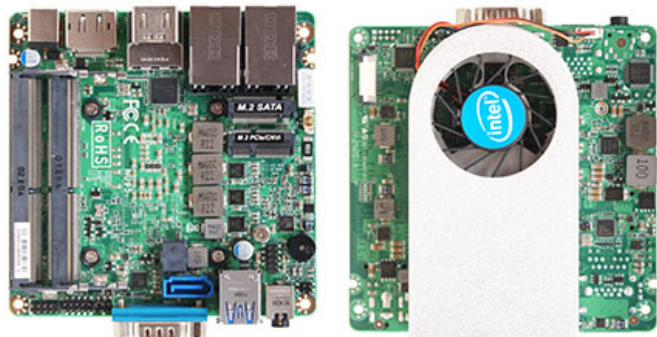
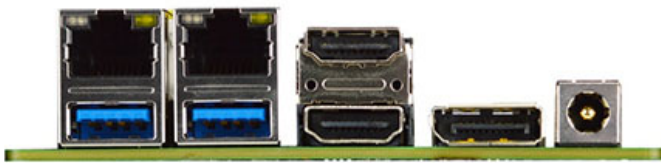


999.00 EUR

incl. 19% VAT, plus shipping

- **Intel Comet Lake !**
- **NUC Formfactor !**
- **Support Triple Displays !**

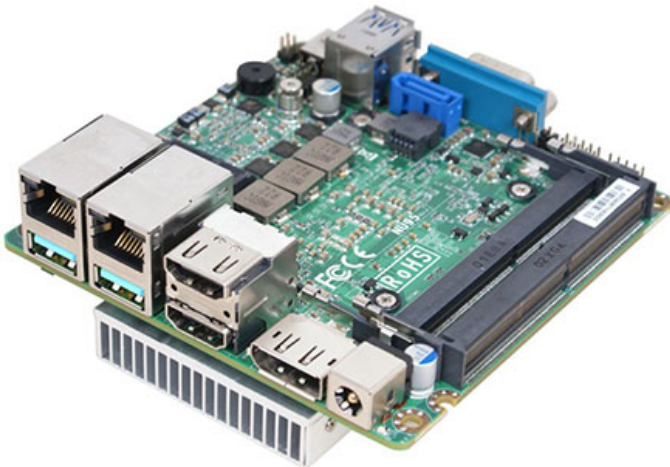

- Intel® 10th Gen Comet lake i5-10210U 1.60GHz/QC Core™ MCP Processor
- 2\* DDR4 2666MHz up to 64GB
- 1\* Intel® I219LM GbE, 1\* Intel® i211AT GbE
- 1\* SATAIII, 1\* M.2 (M key), 1\* M.2 (E key) Support CNVi
- 2\* HDMI, 1\* DP
- 1\* RS232/422/485, 4\* USB3.2, 2\* USB2.0
- 12~24V DC in
- NUC Form Factor (101 \*101 mm)

Model	– JNU95-10210
Form Factor	– NUC (101 * 101mm)

Processor System	<ul style="list-style-type: none"> <li>– Intel® 10th Gen. Comet lake Core™ MCP Processor, I5-10210U QC, 1.6GHz, 15W</li> <li>– SoC chipset</li> <li>– AMI 128M Flash ROM BIOS</li> </ul>
Expansion Slot	<ul style="list-style-type: none"> <li>– 1* M.2 M key (2242, SATA interface)</li> <li>– 1* M.2 E key (2230, Support CNVi)</li> <li>– 1* SATAIII</li> </ul>
Memory	<ul style="list-style-type: none"> <li>– 2* DDR4 2666 MHz SO-DIMM up to 64GB</li> </ul>
Graphics	<ul style="list-style-type: none"> <li>– 1* HDMI1.4 (Max Resolution : 4096×2304@30Hz)</li> <li>– 1* HDMI2.0 (Max Resolution : 4096×2304@60Hz)</li> <li>– 1* DP (Max Resolution : 4096×2304@60Hz)</li> <li>– Support Triple Displays</li> </ul>
Ethernet	<ul style="list-style-type: none"> <li>– 1* Intel® I219LM GbE</li> <li>– 1* Intel® i211AT GbE</li> </ul>
Audio	<ul style="list-style-type: none"> <li>– HD Audio: Realtek® ALC662</li> </ul>
SATA	<ul style="list-style-type: none"> <li>– 1* SATAIII (6.0Gb/s)</li> </ul>
Rear I/O	<ul style="list-style-type: none"> <li>– 2* HDMI</li> <li>– 1* DP</li> <li>– 2* RJ45</li> <li>– 2* USB3.2 (Gen2)</li> <li>– 12~24V DC-in</li> </ul>
Front I/O	<ul style="list-style-type: none"> <li>– 1* Audio (Line-out, MIC)</li> <li>– 1* RS232/422/485 (Support 5/12V TTL)</li> <li>– 2* USB3.2 (Gen2)</li> </ul>
Internal Connector	<ul style="list-style-type: none"> <li>– 2* USB2.0</li> <li>– 1* SATAIII (6.0Gb/s)</li> <li>– 1* M.2 (M key)</li> <li>– 1* M.2 (E key)</li> <li>– 1* GPIO (8bit, 5V)</li> <li>– 1* AT mode</li> </ul>

Watchdog Timer	<ul style="list-style-type: none"><li>– From Super I/O to drag RESETCON#</li><li>– 256 segments (10 ~ 255min)</li></ul>
Power	<p>12~24V DC-in, AT/ATX Supported</p> <ul style="list-style-type: none"><li>– AT: Directly PWR on as Power input ready</li><li>– ATX: Press Button to PWR on after Power input ready</li></ul>
Compliance	<ul style="list-style-type: none"><li>– CE, FCC, RoHS, REACH</li></ul>
Temperature	<ul style="list-style-type: none"><li>– Operating: 0°C ~ 60°C</li><li>– Storage: -20°C ~ 85°C</li><li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li></ul>
OS Support	<ul style="list-style-type: none"><li>– Windows 10, Linux</li></ul>