




198.00 EUR

incl. 19% VAT, plus shipping

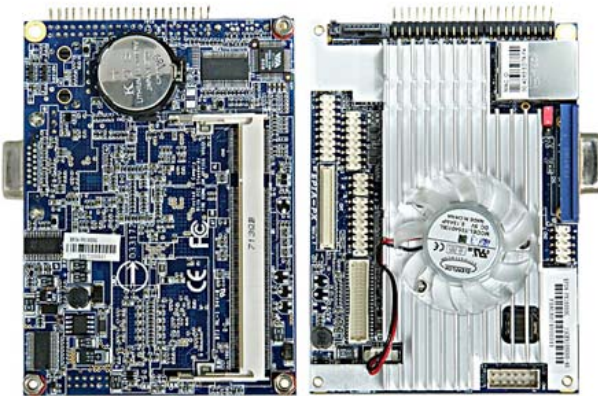

- Pico-ITX
- SATA
- DDR-II !
- 1 Ghz CPU

<b>Model</b>	• VIA EPIA PX10000G
<b>Processor</b>	• VIA C7 1.0 GHz - Socket NanoBGA2
<b>Chipset</b>	• VIA VX700 Unified Digital Media IGP Chipset
<b>System Memory</b>	• 1 DDR2 533 SODIMM socket Up to 1GB memory size
<b>VGA</b>	• Integrated VIA UniChrome Pro II 3D/2D AGP graphics with MPEG-2/4 and WMV9 decoding acceleration
<b>Onboard IDE</b>	• 1 UltraDMA 133/100/66 connector (2.0mm 44-pin header)
<b>Onboard Serial ATA</b>	• 1 SATA connector
<b>Onboard LAN</b>	• 1 VIA VT6106S 10/100Mbps Ethernet controller with Power Management System
<b>Onboard Audio</b>	• VIA VT1708A High Definition Audio Codec
<b>Internal I/O Connectors</b>	• 4 USB pin headers for 4 USB 2.0 ports • 1 COM port connector • 1 PS2 mouse/keyboard pin header

- 1 LVDS/DVI connector
- 1 Multimedia connector to support external TV-out interface,  
Video capture port interface and Low pin count interface
- 1 Audio pin header for line-out, line-in, mic-in, S/PDIF in,  
and 7.1 channels audio output
- 1 Fan pin header for CPU fan
- 1 Pico-iTX power connector

**External I/O Ports**

- 1 RJ-45 LAN port
- 1 VGA port

**BIOS**

- Award BIOS
- 4/8Mbit flash memory

**Management**

- CPU temperature reading (manufacturing option)
- Watch Dog Timer (manufacturing option)
- Keyboard-Power-on, Timer-Power-on
- Wake-on-LAN
- System power management
- AC power failure recovery

**Operating Temperature**

- 0°C ~ 50°C

**Operating Humidity**

- 0% ~ 95% (relative humidity: non-condensing)

**Form Factor**

- Pico-ITX 10 cm x 7.2 cm