


279.00 EUR

incl. 19% VAT, plus shipping

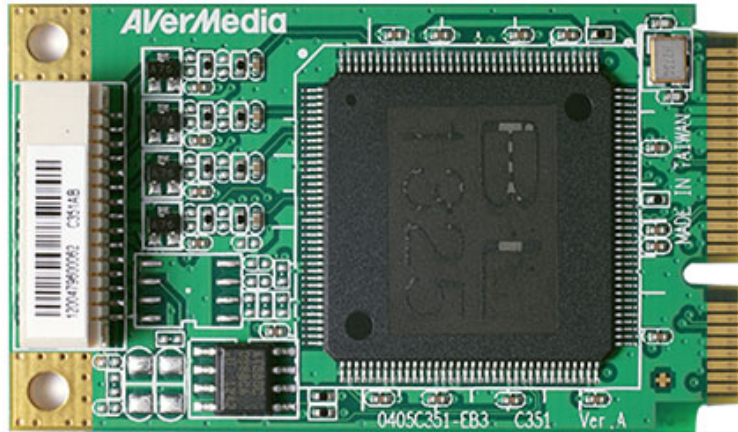

- **Quad-Channel !**

Support:  [Datasheet](#)

The DarkCrystal SD Capture Mini-PCIe Quad is capable of preserving up to four channels simultaneously from multiple input sources. The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture or encoding demands. Saving you cost and a valuable slot on your PC.

The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture and encoding demands. All while saving a valuable slot on your PC.

- Video capture with composite input
- 4-channel concurrent capture solution
- Standard minicard dimension
- Mainstream programming languages supported
- DirectShow compatible

Module Type	PCI Express Minicard
Input	4-ch Composite Audio(L/R)
Video Resolution	NTSC (29.97Hz): 720 x 480, 640 x 480, 360 x 240, 320 x 240, 180 x 120, 160 x 120 PAL (25Hz): 720 x 576, 640 x 480, 360 x 288, 180 x 144
Color Adjustment	Brightness, Contrast, Hue (NTSC only), Saturation
Operating Environment	Temperature: 0 to +55 °C Humidity: 0 to 90% RHNC
Storage Environment	Temperature: -30 to +65 °C Humidity: 0 to 90% RHNC

Power Requirement

1.2W

Dimensions (L x W)

50.95 x 30mm

System Requirements

CPU

Intel® Pentium®4 3.0 GHz

AMD Athlon™ 64 3200+

Memory

512 MB RAM

VGA

VGA card with support for DirectX9.0c or above

Sound Card

Yes

Supported OS

Windows 7/8.1/10 (32/64 bits), Linux (32/64 bits)*